




# Video Intercom / Access Control / Alarm

Products and Solutions



# FACE RECOGNITION TERMINALS

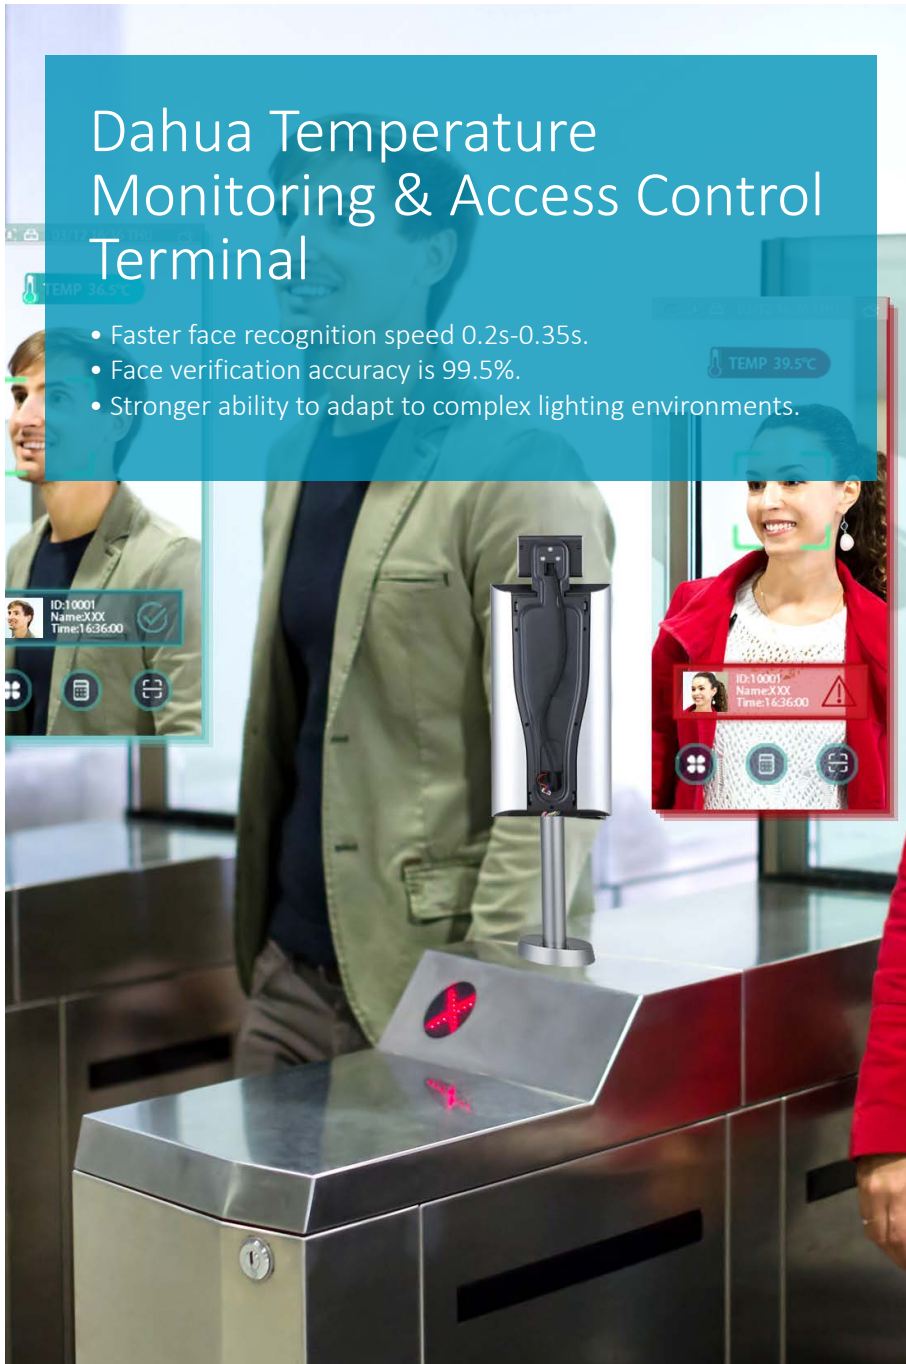

## Dahua Temperature Monitoring & Access Control Terminal

- Faster face recognition speed 0.2s-0.35s.
- Face verification accuracy is 99.5%.
- Stronger ability to adapt to complex lighting environments.

### Temperature Series Products



	Model	DHI-ASI7213X-V1-T1	DHI-ASI7213YO-V3-T0
<b>Basic</b>	Image		
	Product	Forehead Temperature Monitoring	Wrist Temperature Monitoring
<b>Face Recognition Performance</b>	Screen	2.5D curved, 7 inch touch screen	7 inch touch screen
	Card Capacity	100,000	50,000
	Face Capacity	100,000	50,000
	Log Capacity	300,000	100,000
	FR Speed	0.2"	0.35"
	Face Verification Accuracy	99.5%	99.5%
	Material	PC+Aluminium-alloy	PC+ABS
	Mask Detection	YES	YES
<b>Temperature Monitoring Performance</b>	Temperature Monitor Range	30°C~-45°C	30°C~-45°C
	Operation Environment Temperature	10°C~-35°C	10°C~-35°C
	Temperature Monitoring Distance	30cm-180cm	1cm-5cm
	Temperature Monitoring Speed	0.2"	1"
	Temperature Monitoring Error	≤ 0.5°C	≤ 0.3°C
<b>Installation</b>	Install Environment	Indoor	Outdoor (Shield Necessary)
	Mounted Method	Wall Mounted Vertical Mounted Desktop Mounted On-turnstile Mounted	Vertical Mounted Desktop Mounted
<b>Others</b>	Platform	DSS Express Smartpss-AC DMSS	DSS Express Smartpss-AC DMSS
	NVR	NVR5-4KS2 NVR5-I	NVR5-4KS2 NVR5-I
	VTH	DHI-VTH5341G--Android DHI-VTH5421EW-H--Handset DHI-VTH2421FW-P	DHI-VTH5341G--Android DHI-VTH5421EW-H--Handset DHI-VTH2421FW-P

## Face To Convenient Future

- Fast: face recognition speed is less than 0.3 second per person.
- Accurate: 99.5% accurate and strong adaptability to harsh environment.
- Convenient: touchless access; diverse installation for option; multiple management interface.
- Trusted: comply with GDPR; anti-spoofing algorithm against photo and video attack.

# FACE RECOGNITION TERMINALS




## FACT Series Products

FACT Series Products	
	ASA3213GL-MW
Model	 
Screen	4.3" LCD touchscreen, 480 x 272
Reader Format	13,56 MHz Mifare Classic (IC)
Communication	RS485
Interface	USB
Alarm In/Out	1/1
Users	500
Card Capacity	500
Fingerprint	—
Face Capacity	500
Record Capacity	150,000
Face Recognition Speed	0.3s
Users Roles	—
Time Plans	—
Alarm Types	—
Ethernet	10/100Mbps
Ingress Protection	—
Working Temperature	-10°C~+55°C
Power Supply	DC 12V/1.5A



# FACE RECOGNITION TERMINALS

## FACT Series Products




	ASI3213G-MW	ASI6213J-MW	ASI6214J-MFW
Model			
Screen	4.3" LCD touchscreen, 480 × 272	4.3" LCD touchscreen, 480 × 272	4.3" LCD touchscreen, 480 × 272
Reader Format	13,56 MHz Mifare Classic (IC)	13,56 MHz Mifare Classic (IC)	13,56 MHz Mifare Classic (IC)
Communication	RS485	RS485 Wiegand Input/Output (26/34/66 bits)	RS485 Wiegand Input/Output (26/34/66 bits)
Interface	USB	USB	USB
Alarm In/Out	1/1	1/1	1/1
Users	1,500	6,000	6,000
Card Capacity	1,500	6,000	6,000
Fingerprint	—	—	6,000
Face Capacity	1,500	6,000	6,000
Record Capacity	150,000	150,000	150,000
Face Recognition Speed	0.3s	0.3s	0.3s
Users Roles	General, VIP, Guest, Patrol, Duress, Disabled	General, VIP, Guest, Patrol, Duress, Disabled	General, VIP, Guest, Patrol, Duress, Disabled
Time Plans	128	128	128
Alarm Types	Door time out, Intrusion, Duress, Tamper, Anti-passback, Unauthorized Card Overcount	Door time out, Intrusion, Duress, Tamper, Anti-passback, Unauthorized Card Overcount	Door time out, Intrusion, Duress, Tamper, Anti-passback, Unauthorized Card Overcount
Ethernet	10/100Mbps	10/100Mbps	10/100Mbps
Ingress Protection	—	IP65	IP65
Working Temperature	-10°C~+55°C	-30°C~+60°C	-30°C~+60°C
Power Supply	DC 12V/1.5A	DC 12V/2A	DC 12V/2A

# Based on deep learning face recognition algorithm

- Faster face recognition speed--0.2s/0.35s
- Larger face template capacity--30K-100K
- Stronger ability to adapt to complex lighting environments



## FACE RECOGNITION TERMINALS

Face Recognition Terminals			
	ASI7213X	ASI7214X	ASI7213Y-V3
Model			
Screen	7" touchscreen, 1024x600	7" touchscreen, 1024x600	7" touchscreen, 1024x600
Reader Format	13,56 MHz Mifare Classic (IC)	13,56 MHz Mifare Classic (IC)	13,56 MHz Mifare Classic (IC)
Communication	RS485 Wiegand Input/Output (26/34/66 bits)	RS485 Wiegand Input/Output (26/34/66 bits)	RS485 Wiegand Input/Output (26/34/66 bits)
Interface	USB	USB	USB
Alarm In/Out	2/2	2/2	2/2
Users	100,000	100,000	50,000
Card Capacity	100,000	100,000	50,000
Fingerprint	—	10,000	—
Face Capacity	100,000	100,000	50,000
Record Capacity	300,000	300,000	100,000
Face Recognition Speed	≤0.2s	≤0.2s	≤0.35s
Users Roles	General, VIP, Guest, Patrol, Duress, Disabled	General, VIP, Guest, Patrol, Duress, Disabled	General, VIP, Guest, Patrol, Duress, Disabled
Time Plans	128	128	128
Alarm Types	Door time out, Intrusion, Duress, Tamper, Anti-passback, Unauthorized Card Overcount	Door time out, Intrusion, Duress Fingerprint Duress, Tamper, Anti-passback, Unauthorized Card Overcount	Door time out, Intrusion, Duress, Tamper, Anti-passback, Unauthorized Card Overcount
Ethernet	10/100Mbps	10/100Mbps	10/100Mbps
Ingress Protection	IP65	IP65	—
Working Temperature	-30°C~+60°C	-30°C~+60°C	-10°C~+55°C
Power Supply	DC 12V/2A	DC12V/2A	DC 12V/2A



# ENABLING A SAFER SOCIETY AND SMARTER LIVING

## Dahua USA

Tel: +1 (949) 679-7777  
Email: sales.usa@dahuatech.com  
support.usa@dahuatech.com

## Dahua Mexico

Tel: +52 55 67231936  
Email: sales.mx@dahuatech.com  
support.mx@dahuatech.com

## Dahua Colombia

Tel: +571 7446110  
Email: sales.co@dahuatech.com  
support.co@dahuatech.com

## Dahua Brazil

Tel: +55 11 32511871  
Vendas: comercial.br@dahuatech.com  
Suporte Técnico: suporte.br@dahuatech.com

## Dahua Perú

Tel: +511 500-8555  
Email: sales.pe@dahuatech.com  
support.pe@dahuatech.com

## Dahua Chile

Tel: +56 232705421  
Email: sales.cl@dahuatech.com  
support.chile@dahuatech.com

## Dahua Argentina

Email: project.ar@dahuatech.com

## Dahua Panama

Email: sales.pa@dahuatech.com  
Support: support.pa@dahuatech.com

## Dahua Thailand

Tel: +66 2541 5188  
Email: info.th@dahuatech.com  
hr.th@dahuatech.com

## Dahua Singapore

Tel: +65 65380952  
Email: sales.sg@dahuatech.com

## Dahua Turkey

Email: sales.tr@dahuatech.com  
support.tr@dahuatech.com

## Dahua Malaysia

Tel: +60376620731  
Email: sales.my@dahuatech.com

## Dahua Indonesia

Tel: +62 811 867 7728  
Email: sales.indo@dahuatech.com

## Dahua S.Korea

Tel: +82 7081618889  
Email: sales.kr@dahuatech.com  
support.kr@dahuatech.com

## Dahua India

Tel: +91 1244569100  
Email: sales.india@dahuatech.com

## Dahua Russia

Tel: 8 (499) 682-60-00  
Email: info@dahuatech.com

## Dahua Kazakhstan

Tel: +7 727 3110838  
Email: sales.kz@dahuatech.com

## Dahua VISION LLC

Tel: +998 (78) 1488666  
E-mail: dh\_uzbekistan@dahuatech.com

## Dahua UK

Tel: +44(0)1628 613 500  
Email: sales.uk@dahuatech.com

## Dahua the Netherlands

Tel: +31 (0) 79 799 96 96  
Email: sales.benelux@dahuatech.com

## Dahua Iberia

Tel: +34 917649862  
Email: sales.iberia@dahuatech.com

## Dahua Italy

Tel: +39 362182681  
Email: sales.italy@dahuatech.com

## Dahua Germany

Tel: +49 211 20544121  
Email: sales.de@dahuatech.com

## Dahua France

+33 1 48 53 70 53  
Email: sales.france@dahuatech.com

## Dahua CEE & Nordic

Tel: +48 223957400  
Email: dh.cen@dahuatech.com

## Dahua Poland

Tel: +48 223957400  
Email: biuro.pl@dahuatech.com

## Dahua SRB

+38 1 (11) 4429999  
Email: dh.srb@dahuatech.com

## Dahua Denmark

Email: Nordic.ne@dahuatech.com

## Dahua Hungary

Tel: +36 17899852  
Email: sales.hu@dahuatech.com

## Dahua Bulgaria

Tel: +35929950013  
Email: support.bg@dahuatech.com

## Dahua SRL

Email: marketing.ro@dahuatech.com

## Dahua Czech

Tel: +420 225 986 001  
Email: admin.cz@dahuatech.com

## Dahua S. Africa

Email: sales.za@dahuatech.com

## Dahua Australia

Tel: +61 299285200  
Email: sales.oc@dahuatech.com

## Dahua Middle East

Tel: +971 48815300  
Email: sales.me@dahuatech.com  
info.me@dahuatech.com

\* Design and specifications are subject to change without notice.

Ver. 3, Dec. 2020

## DAHUA TECHNOLOGY

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053  
Tel: +86-571-87688883 Fax: +86-571-87688815  
Email: overseas@dahuatech.com  
www.dahuasecurity.com

